

A120X

SEMICONDUCTOR PROTECTION FUSES



A120X Amp-trap® Form 101 Semiconductor Protection fuses, rated 1/2A through 30A, 1200VAC are popular for use in traction drive auxiliary circuits and similar applications. A120X fuses are also suitable for use on 1000VDC auxiliary circuits with low time constants.

Features/Benefits

- **1000 Volt DC** rated for wide range of circuits
- **Compact size** fits in where competitive sizes will not fit

Ratings

- **AC:** 1/2-30A
1200VAC, 100kA I.R.
- **DC:** 1/2-30A
1000VDC, 100kA I.R.
L/R = 10ms

Approvals

- Ferraz Shawmut Certified


HIGHLIGHTS:

- Fast Acting
- Current Limiting
- Low I²t
- Compact Size

APPLICATIONS:

- Protection of traction drive auxiliary circuits, etc.


Dimensions - In (mm)

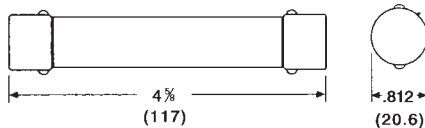

Single Pole Fuse Block for A120X Fuses

FUSE AMPERE RATING	FUSE BLOCK CATALOG NUMBER
1/2-30	P292

Catalog Numbering System

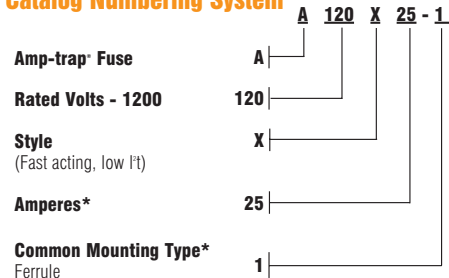

* For ampere ratings and types not listed, call Technical Services.


Standard Fuse Ampere Ratings Catalog Numbers

AMPERE RATING	CATALOG NUMBER	AMPERE RATING	CATALOG NUMBER
1/2	A120X1/2-1	6	A120X6-1
1	A120X1-1	10	A120X10-1
2	A120X2-1	15	A120X15-1
3	A120X3-1	20	A120X20-1
4	A120X4-1	25	A120X25-1
5	A120X5-1	30	A120X30-1


A120X

SEMICONDUCTOR PROTECTION FUSES

A120X1/2 to 30

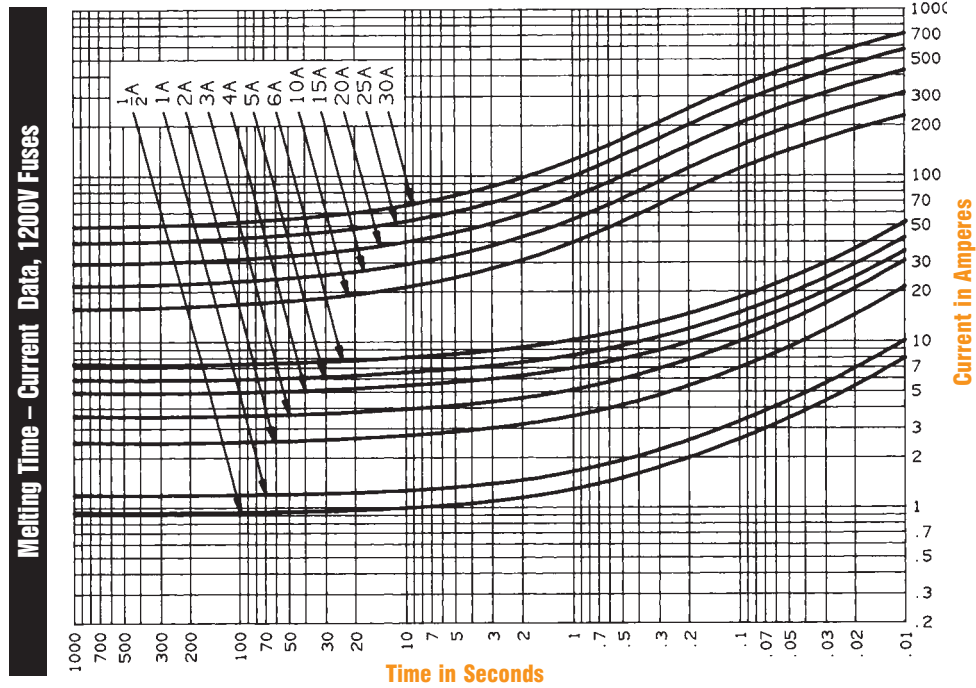

Peak Let-Through Current Data - A120X2 to 30, 1200 Volts AC

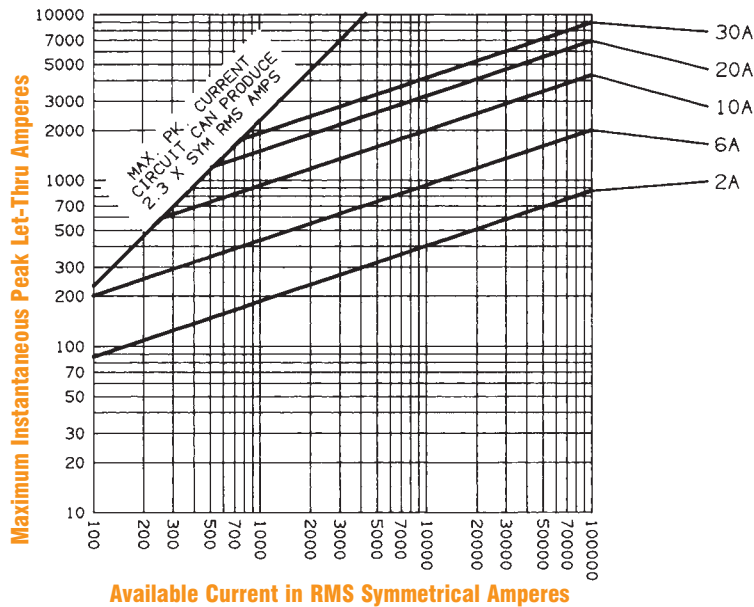

I^t Data - 1200 Volts AC, 100kA

FUSE AMPERE RATING	I ^t DATA	
	MELTING (A ² s)	CLEARING (A ² s)
1/2	.10	1.9
1	.40	7.5
2	4.3	30
3	8.9	69
4	10	120
5	18	190
6	29	280
10	500	970
15	1100	2100
20	2000	3700
25	3100	5700
30	4400	8300