

SBS

1-3/8" X 13/32" FERRULE FUSES



UNIQUE DIMENSIONS FOR TODAY'S SMALLER EQUIPMENT AND COMPONENTS

Fast-acting general purpose SBS fuses were developed in response to the industry's demand for smaller equipment and components. They are the only fuses in their size with a full 600 volt AC rating for all ampere ratings by Underwriters Laboratories standard 198G and CSA No. 59.2, and are the only fuses of this size with an interrupting rating of 100kA RMS, compared to 10kA on other brands. SBS fuses are 1-3/8" long, smaller by 1/8" than most standard midget fuses and are available in 22 ampere ratings, from 2/10A to 30A. (Not for Branch Circuit Protection).

Features/Benefits

- **Small unique physical size** for maximum design flexibility and non-interchangeability with other fuse classes
- **Fiberglass body** provides dimensional stability in harsh industrial environments

HIGHLIGHTS:

- Fast Acting
- General Purpose
- Unique Dimensions

APPLICATIONS:

- Control Circuits
- Lighting Ballasts
- Meter Circuits
- Electronic Circuits

Ratings

- **AC:** 2/10 to 30A
600VAC, 100kA I.R.

Approvals

- UL Listed to Standard 248-14
- CSA Certified to Standard C22.2 No. 248.14




Standard Fuse Ampere Ratings, Catalog Numbers

AMPERE RATING	CATALOG NUMBER	AMPERE RATING	CATALOG NUMBER	AMPERE RATING	CATALOG NUMBER
2/10	SBS2/10	1-8/10	SBS1-8/10	10	SBS10
4/10	SBS4/10	2	SBS2	12	SBS12
1/2	SBS1/2	3	SBS3	15	SBS15
3/4	SBS3/4	4	SBS4	20	SBS20
8/10	SBS8/10	5	SBS5	25	SBS25
1	SBS1	6	SBS6	30	SBS30
1-1/2	SBS1-1/2	7	SBS7		
1-6/10	SBS1-6/10	8	SBS8		

Cross Reference: SBS will replace Bussmann BBS, Littelfuse BLS fuses

Peak Let-thru Current Data — 3/4 - 30 Amperes, 600 Volts AC

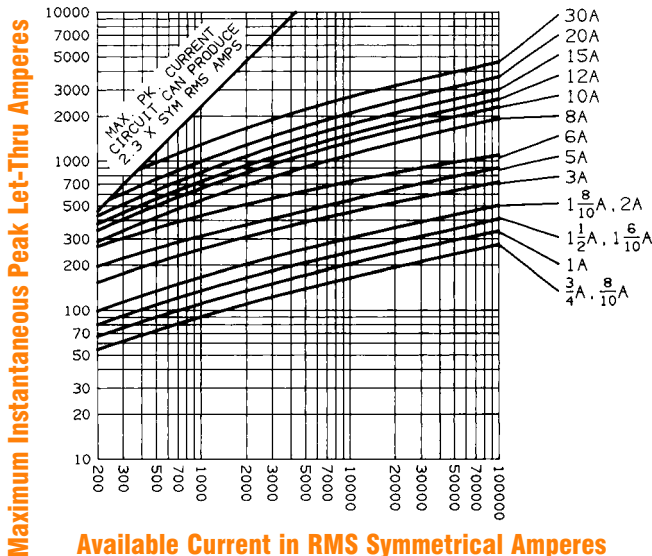

Melting Time — Current Data — 2/10 - 30 Amperes, 600 Volts AC

