

# USCC & USM 24, 48 & 600 VOLT / ULTRASAFE™ FUSEHOLDERS



## ULTRASAFE MODULAR FUSE HOLDERS

Ferraz Shawmut ULTRASAFE™ modular 24, 48 and 600 volt Fuse Holders introduce a new level of safety for Class CC (USCC) and Midget 1-1/2" x 13/32" (USM) as well as DC rated fuses up to 30 amperes. ULTRASAFE holders qualify as "finger safe" under IEC and DIN standards to an IP20 grade of protection, including fuse changing (with the flick of a finger). ULTRASAFE holders are available in 1, 2, 3 or 4 poles, with or without blown-fuse indicators in each pole. AC indicators are orange and DC are red. The multi-pole units can also be made up by ordering pin-tie handles for field assembly. ULTRASAFE holders save up to 15% mounting space and any combination can be snapped onto 35mm DIN rail for extra savings in panel building time. ULTRASAFE holders with Class CC fuses chosen for Type "2" protection give one of the safest protection packages in the industry. Ultrasafe body material is tough and durable polyamide, with exceptional insulating properties.

### HIGHLIGHTS:

- Finger Safe
- Optional Indicator Lights
- DIN Rail Mount
- Compact Footprint
- Quick, Easy Fuse Change

### APPLICATIONS:

- All circuits up to 600 volts for motors, control circuits, transformers, etc.
- Non-load disconnect
- 12, 24 and 48 volt DC circuits

### RECOMMENDED FUSE USAGE

**USCC** .....use with **ATDR\***, **ATMR**, **ATQR**

**USM** .....use with **ATQ**, **ATM\***, **A6Y-2B**, **A25Z-2**, **TRM**, **OTM**, **A13X-2**, **GFN**, **GGU**, **A60Q-2**

\* Recommended for DC Applications

### Ratings

- 600VAC, 30A  
Min. voltage to operate indicator light:  
90VAC  
[Less than 0.7 mA leakage current at 600V]
- Special Indicator for 24VDC, 30A
- Special Indicator for 48VDC, 30A
- Withstand rating:  
Class CC 200kA I.R.  
Midget Fuse 100kA I.R.

### Approvals

- All Ultrasafe Fuse Holders meet the requirements of UL512
- UL Listed Class CC  
Guide IZLT, File E52283
- UL Recognized Component  
Midget  
Guide IZLT2, File E52283
- CSA Certified Class CC & Midget  
C22.2, Class 6225  
File 32169
- IEC 269  
690VAC, 32A  
Midget version only.



# USCC & USM 24, 48 & 600 VOLT / ULTRASAFE™ FUSEHOLDERS

## For use with Class CC Fuses

CATALOG NO.	DESCRIPTION
USCC1	1 pole
USCC1I	1 pole with indicator
USCC2	2 pole
USCC2I	2 pole with indicators
USCC3	3 pole
USCC3I	3 pole with indicators
USCC3IN	3 pole with indicators and a 4th neutral pole
USCC3N	3 pole with a 4th neutral pole
USCC4	4 pole
USCC4I	4 pole with indicators

## For use with Midget (1-1/2" x 13/32") Fuses

USM1	1 pole
USM1I	1 pole with indicator
USM2	2 pole
USM2I	2 pole with indicators
USM3	3 pole
USM3I	3 pole with indicators
USM3IN	3 pole with indicators and a 4th neutral pole
USM3N	3 pole with a 4th neutral pole
USM4	4 pole
USM4I	4 pole with indicators

## Neutral Link Pole

USN	1 Pole with Integral Neutral Link
-----	-----------------------------------

## Accessories

USPTH2	Pin-tie handle for 2 poles
USPTH3	Pin-tie handle for 3 poles
USPTH4	Pin-tie handle for 4 poles


## Special Indicator Options For use with Low Voltage DC Rated Class CC & Midget Fuses

PART NUMBER	INDICATOR TYPE	OPERATING VOLTAGE	LEAKAGE CURRENT
USM1I-DC24	LED	12 to 24 VDC	10mA max. (@24vdc)
USM1I-DC24P	LED	20 to 24 VDC	1mA max. (@24vdc)
USM1I-DC48	LED	35 to 48 VDC	10mA max. (@48vdc)
USCC1I-DC24	LED	12 to 24 VDC	10mA max. (@24vdc)
USCC1I-DC48	LED	35 to 48 VDC	10mA max. (@48vdc)



## Dimensions

DIMENSION	mm	In
A	17.5	0.69
B	35.0	1.38
C	52.5	2.07
D	70.0	2.76
E	78.0	3.07
F	2.5	0.10
G	78.0	3.07
H	59.0	2.32
I	42.5	1.67
J	5.0	0.20
K	45.0	1.77

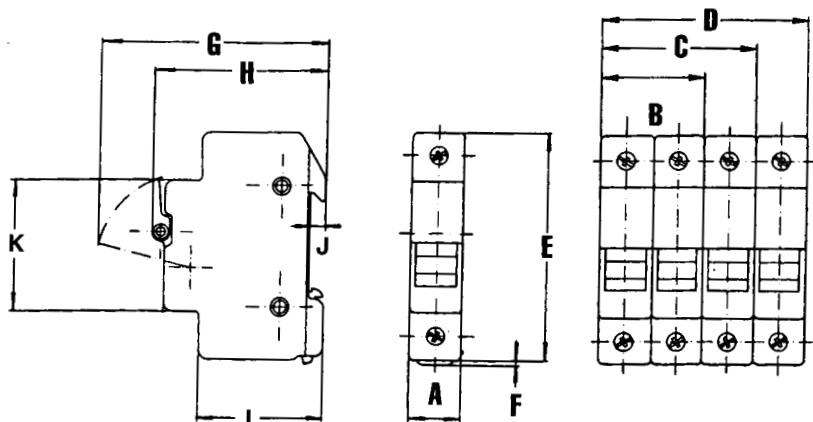

**Terminal screws:** Phillips/slot head  
**Suggested screw torque:** 14.75 in.-lbs.  
**Connector type:** Pressure plate  
**Wire range:** #6 to #14 (solid/stranded Cu)  
**Load-break disconnect:** No