




Type SJS/SJP 4.5ØX14.5mm Normal Blow Glass Fuse Series

SJS


SJP-A

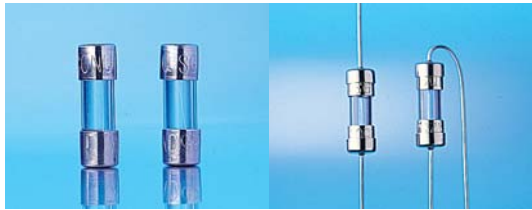

Type JWL/JWP 5ØX20mm Slow Blow Glass Fuse Series

JWL

JWP-A

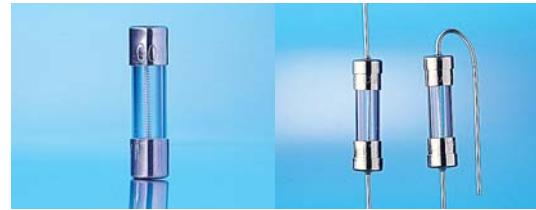

Approvals

SJS & SJP (With Pig-Tail)

MITI 1A~10A

Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA~10A	4 Hrs.	1 Hrs	5 Sec	

Interrupting Ratings

1A~10A: 500 amperes at 125V AC
100 amperes at 250V AC

Physical Specification

Materials

Glass body / Nickel Brass Caps

Lead Wire: Tin-lead plated Copper, Diameter Ø0.6mm.

Packaging

In Bulk: SJS - 2,000 pcs ; SJP - 500 pcs per box

Approvals

JWL & JWP (With Pig-Tail)

MITI 1A~30A

Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA~20A	4 Hrs.	1 Hrs	5 Sec.	120 Sec

Interrupting Ratings

1A~15A: 500 amperes at 125V AC
100 amperes at 250V AC

Physical Specification

Materials

Glass body / Nickel Brass Caps

Lead Wire: Tin-lead plated Copper, Diameter Ø0.8mm.


Packaging

In Bulk: JWL - 1,000 pcs ; JWP - 500 pcs per box

Type SJL/SJT 4.5ØX14.5mm Slow Blow Glass Fuse Series

SJL

SJT-A

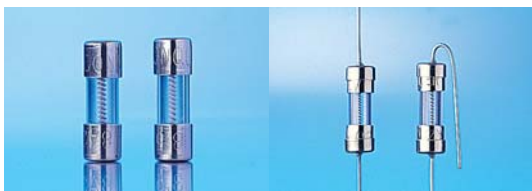

Type JSL/JST 5ØX20mm Slow Blow Glass Fuse Series

JSL

JST-A



Approvals

SJL & SJT (With Pig-Tail)

MITI 1A~10A

Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA~10A	4 Hrs.	1 Hrs	5 Sec.	120 Sec

Interrupting Ratings

1A~10A: 500 amperes at 125V AC
100 amperes at 250V AC

Physical Specification

Materials

Glass body / Nickel Brass Caps

Lead Wire: Tin-lead plated Copper, Diameter Ø0.6mm.

Packaging

In Bulk: SJL - 2,000 pcs ; SJT - 500 pcs per box

Approvals

JSL & JST (With Pig-Tail)

MITI 1A~30A

Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA~20A	4 Hrs.	1 Hrs	2 Sec.	120 Sec

Interrupting Ratings

1A~15A: 500 amperes at 125V AC
100 amperes at 250V AC

Physical Specification

Materials

Glass body / Nickel Brass Caps

Lead Wire: Tin-lead plated Copper, Diameter Ø0.8mm.

Packaging

In Bulk: JSL - 1,000 pcs ; JST - 500 pcs per box