



## Type JDL/JDP

6.3ØX30mm RoHS Pb

*Slow Blow Glass Tube Fuse Series*

JDL

JDP-A




## Type JTE/JTP

6.3ØX30mm RoHS Pb

*Slow Blow Glass Tube Fuse Series*

JTE

JTP-A

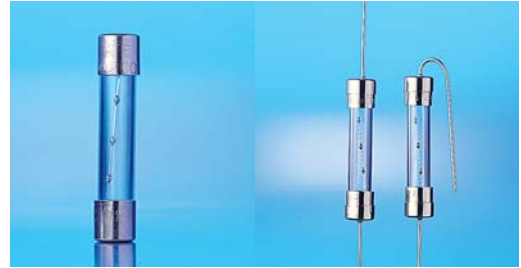

### Approvals

JDL & JDP (With Pig-Tail)

MITI JDL 1~30A 125V, 1~30A 250V  
 JDP 1~30A 125V, 1~30A 250V


### Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA~3A	4 Hrs.	1 Hr	5 Sec	120 Sec
3.15A~30A	4 Hrs.	1 Hr	12 Sec	120 Sec

### Interrupting Ratings

1A~30A: 500 amperes at 125V AC  
 100 amperes at 250V AC

### Mechanical Dimensions

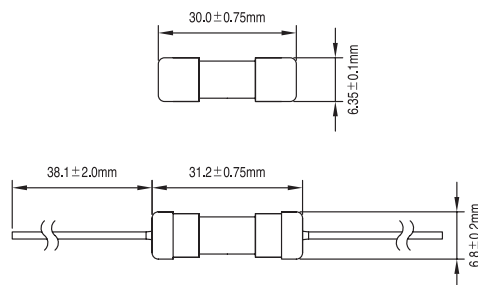

### Physical Specification

#### Materials

Glass body / Nickel Brass Caps  
 Lead Wire:  
 Diameter Ø0.8 mm 12A and less.  
 Diameter Ø1.0 mm for rating above 13A to 19A.  
 Diameter Ø1.6 mm for rating above 20A.

#### Packaging

In Bulk:  
 JDL - 500 pcs ; JDP - 250 pcs per box

### Approvals

JTE & JTP (With Pig-Tail)

MITI JTE 1~30A 125V, 1~30A 250V  
 JTP 1~30A 125V, 1~30A 250V


### Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA~30A	4 Hrs.	1 Hr	2 Sec.	120 Sec

### Interrupting Ratings

1A~30A: 500 amperes at 125V AC  
 100 amperes at 250V AC

### Mechanical Dimensions

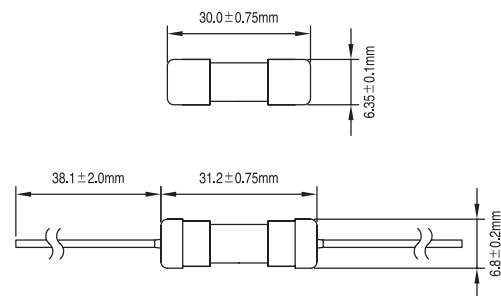

### Physical Specification

#### Materials

Glass body / Nickel Brass Caps  
 Lead Wire:  
 Diameter Ø0.8 mm 12A and less.  
 Diameter Ø1.0 mm for rating above 13A to 19A.  
 Diameter Ø1.6 mm for rating above 20A.

#### Packaging

In Bulk:  
 JTE - 500 pcs ; JTP - 250 pcs per box